




Safe,
Dependable,
Durable.

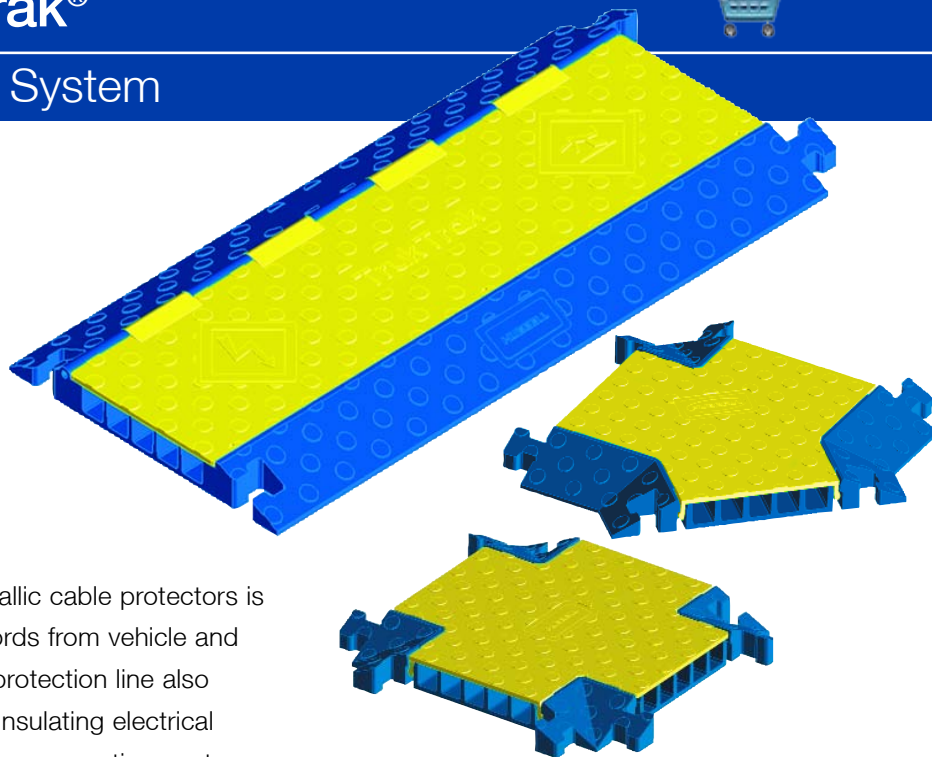

Hubbell Wiring Device-Kellems line of non metallic cable protectors is designed to safeguard electrical cables and cords from vehicle and pedestrian traffic. The Hubbell modular cable protection line also permits compliance with NEC® Article 525 for insulating electrical cables and cord at carnivals, amusement parks, convention centers and similar public areas.

TredTrak

The TredTrak system is a 5 channel modular cable protection system that will protect cables up to 1.28" (32.5mm) in diameter. It is designed to support pedestrian and light vehicle traffic in public, institutional and commercial applications. It can also be interconnected to protect cables and cords of any length.

TrukTrak

The Hubbell modular cable protector line also includes the TrukTrak system for heavy duty applications. The TrukTrak system comes in 5, 3 and 2 channel sizes and will protect cables up to 3.25" (82.6mm) in diameter. It is ideal for the industrial environment where it is necessary to support heavy trucks and fork lifts.

Features:

- High density polyurethane construction supports heavy loads and is weather resistant.
- Modular interlocking design allows for easy installation, breakdown and storage.
- Circular surface pattern reduces slipping and skidding.
- Safety blue and yellow colors provide high visibility.



TredTrak



TrukTrak



Wiring Device-Kellems

TredTrak® and TrukTrak®

Modular Cable Protection System



Ordering Information


Description	Catalog Numbers	A	B	C	Weight lb (kg)	Channel		
		Length in (mm)	Width in (mm)	Height in (mm)		Width in (mm)	Height in (mm)	
TrukTrak® System								
5-Channel TrukTrak®, blue & yellow.	HBLTT5B	36" (914.4)	20" (508)	2.31" (58.7)	29 lbs. (13.2 kg)	1.25" (31.8)	1.25" (31.8)	
5-Channel TrukTrak® end caps (pair only), yellow.	HBLTT5ECB							
	(Female)	7.5" (190.5)	20" (508)	2.31" (58.7)	4.7 lbs. (2.1 kg)	1.25" (31.8)	1.25" (31.8)	
	(Male)	5.25" (133.3)	20" (508)	2.31" (58.7)	4.7 lbs. (2.1 kg)	1.25" (31.8)	1.25" (31.8)	
5-Channel 45° right turn TrukTrak®, blue & yellow.	HBLTT545RB	25" (635)	20" (508)	2.31" (58.7)	13 lbs. (5.9 kg)	1.25" (31.8)	1.25" (31.8)	
5-Channel 45° left turn TrukTrak®, blue & yellow.	HBLTT545LB	25" (635)	20" (508)	2.31" (58.7)	13 lbs. (5.9 kg)	1.25" (31.8)	1.25" (31.8)	
3-Channel TrukTrak®, blue & yellow.	HBLTT3B	36" (914.4)	20" (508)	3.05" (77.5)	36 lbs. (16.3 kg)	2.25" (57.2)	2.25" (57.2)	
3-Channel TrukTrak® end caps (pair only), yellow.	HBLTT3ECB							
	(Female)	8.25" (209.6)	20" (508)	3.05" (77.5)	6.5 lbs. (2.9 kg)	2.25" (57.2)	2.25" (57.2)	
	(Male)	6.38" (161.9)	20" (508)	3.05" (77.5)	6.5 lbs. (2.9 kg)	2.25" (57.2)	2.25" (57.2)	
2-Channel TrukTrak®, blue & yellow.	HBLTT2B	36" (914.1)	22" (558.8)	4.13" (104.9)	44 lbs. (19.9 kg)	3.25" (82.6)	3.25" (82.6)	
TredTrak® System								
5-Channel TredTrak®, blue & yellow.	HBLTRED5B	36" (914.1)	17.5" (445)	1.95" (50)	18 lb. (8.2)	1.30" (33)	1.30" (33)	
5-Channel TredTrak® end caps (pair only), yellow.	HBLTRED5ECB							
	(Female)	5.5" (138)	17.5" (445)	1.95" (50)	2.5 lb. (1.13 kg)	1.30" (33)	1.30" (33)	
	(Male)	5.5" (138)	17.5" (445)	1.95" (50)	2.5 lb. (1.13 kg)	1.30" (33)	1.30" (33)	
5-Channel TredTrak female end caps (2 females), yellow.	HBLTRED5ECFB	5.5" (138)	17.5" (445)	1.95" (50)	2.5 lb. (1.13 kg)	1.30" (33)	1.30" (33)	
5-Channel "X" fitting, blue & yellow.	HBLTRED5XB	17.5" (445)	17.5" (445)	1.95" (50)	12 lb. (5.43 kg)	1.30" (33)	1.30" (33)	
5-Channel "Y" fitting, blue & yellow.	HBLTRED5YB	17.5" (445)	17.5" (445)	1.95" (50)	12 lb. (5.43 kg)	1.30" (33)	1.30" (33)	

Material Specifications


Material	Cast polyurethane
Operating temp.	-40° F to +120° F (-40°C to +49°C)
Hinge material	Reinforced fiberglass
Safety symbols	Per ANSI. Z535 Series

Product	Min. Footprint in. (mm)	Max Load Capacity Lbs. (N)	
		70°F (21°C)	120°F (48°C)
TredTrak	7 x 7 (178 x 178)	10,500 (46,700)	6,500 (28,900)
"X" Fitting	7 x 7 (178 x 178)	2,900 (12,900)	2,300 (10,230)
"Y" Fitting	7 x 7 (178 x 178)	2,900 (12,900)	2,300 (10,230)
5 TrukTrak	7 x 7 (178 x 178)	20,150 (89,627)	9,200 (40,921)
3 TrukTrak	7 x 8.2 (178 x 208)	14,210 (63,206)	4,653 (20,696)
2 TrukTrak	7 x 7.5 (178 x 191)	10,880 (48,394)	2,095 (9,318)

Female End
(TrukTrak and TredTrak)





Male End
(TrukTrak and TredTrak)



TrukTrak and TredTrak




TrukTrak and TredTrak

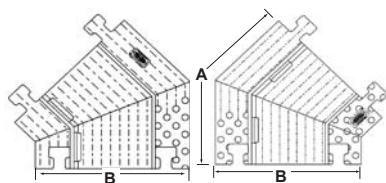


Left turn 45°
(TrukTrak only)

Right Turn 45°
(TrukTrak only)



"X" Fitting
(TredTrak only)



"Y" Fitting
(TredTrak only)



Wiring Device-Kellems